

VT 型片式铝电解电容

VT Series Chip Type Aluminum Electrolytic Capacitors


特点 Features

- 105℃标准品。
- 适用于回流焊。 Reflow soldering is available.
- 适用于高密度表面贴装。 Suitable for high density SMT.
- 符合ROHS指令标准。 Comply with ROHS directive standards.

主要技术性能 Specifications

项目 Items	特性 Characteristics								
工作温度范围 Operating Temperature Range	-40℃ ~ +105℃								
额定电压范围 Rated Voltage Range	6.3V ~ 50V								
标称容量范围 Nominal Capacitance Range	0.1 ~ 1500 μ F								
标称容量允许偏差 Nominal Capacitance Tolerance	± 20% (20℃, 120Hz)								
漏电流 Leakage Current	I≤0.01CRVR or 3(μ A), 取较大者 (2 分钟) CR: 标称容量 (μ F) UR: 额定电压 (V) I≤0.01CRVR or 3(μ A) Whichever is greater(at 20℃, After 2 minutes) CR: Nominal Capacitance (μ F) UR: Rated voltages (V)								
损耗角正切 (tg δ) Dissipation Factor (Max) 20℃, 120Hz	UR (V)	4	6.3	10	16	25	35	50	
	tg δ	0.35	0.28	0.24	0.20	0.16	0.14	0.12	
耐久性 Load Life	+105℃施加额定电压 1000 小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105℃, the capacitor shall meet the following requirement:								
	电容量变化率 Capacitance Change		± 20%初始值以内 Within ± 20% of the initial value						
	损耗角正切 Dissipation Factor		≤ 200%初始规定值 Not more than 200% of the initial specified value						
	漏电流 Leakage Current		≤ 初始规定值 Not more than the initial specified value						
高温贮存 Shelf Life	+105℃贮存 1000 小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105℃, the capacitors shall meet the requirement of load life above								
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	UR (V)		4	6.3	10	16	25	35	50
	Z(-25℃)/Z(+20℃)		7	4	3	2	2	2	2
	Z(-40℃)/Z(+20℃)		15	8	6	4	4	3	3
耐焊接热 Resistance to Soldering Heat	在 250℃的条件下, 电容器在热板上保持 30 秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250℃ for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.								
	电容量变化率 Capacitance Change		± 10%初始值以内 Within ± 10% of the initial value						
	损耗角正切 Dissipation Factor		≤ 初始规定值 Not more than the initial specified value						
	漏电流 Leakage Current		≤ 初始规定值 Not more than the initial specified value						

外形图及尺寸表 Case Size Table

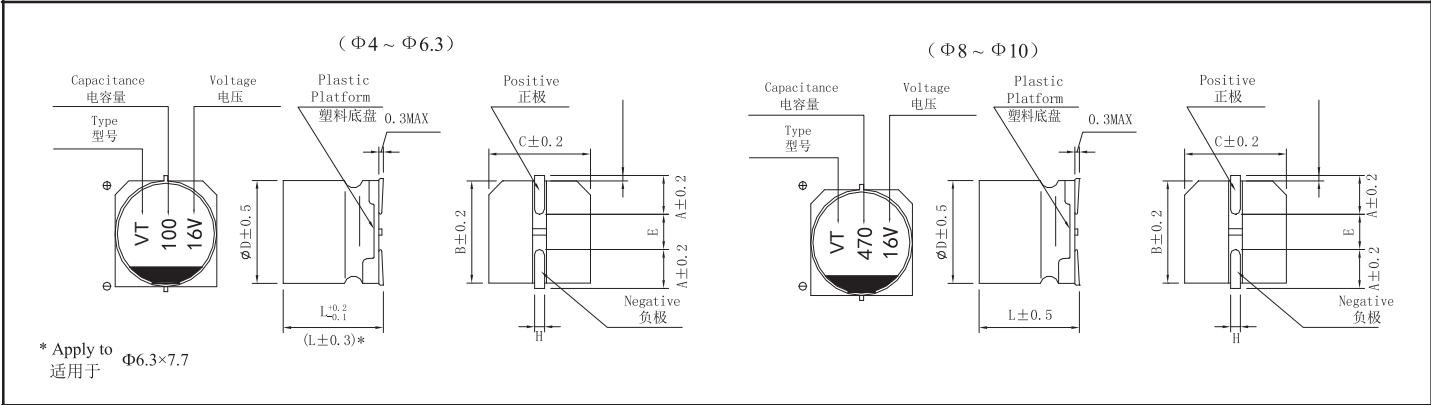

(mm)

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5
A	1.8	2.1	2.4	2.4	2.9	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5
H	0.5 ~ 0.8					0.8 ~ 1.1	

■ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表
Nominal capacitance, rated voltage, rated ripple current and case size table

V μF	6.3		10		16		25		35		50	
	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA
0.1											4×5.4	2.3
0.22											4×5.4	3.4
0.33											4×5.4	4.1
0.47											4×5.4	5
1.0											4×5.4	10
2.2											4×5.4	16
3.3									4×5.4	13	4×5.4	16
4.7							4×5.4	22	4×5.4	22	5×5.4	23
10					4×5.4	28	5×5.4	28	5×5.4	30	6.3×5.4	32
22	4×5.4	29	5×5.4	30	5×5.4	39	6.3×5.4	55	6.3×5.4	60	6.3×7.7	51
33	5×5.4	34	5×5.4	34	5×5.4	35	6.3×5.4	65	8×6.5	84	6.3×7.7	70
47	5×5.4	46	6.3×5.4	48	6.3×5.4	70	6.3×5.4	70	6.3×7.7	80	6.3×7.7	80
100	6.3×5.4	71	6.3×5.4	69	6.3×5.4	70	6.3×7.7	100	8×10.5	296	8×10.5	230
220	6.3×7.7	120	6.3×7.7	120	6.3×7.7	120	8×10.5	320	10×10.5	435	10×10.5	375
330	8×10.5	290	8×10.5	305	8×10.5	425	10×10.5	450	10×10.5	450		
470	8×10.5	330	8×10.5	340	8×10.5	340	10×10.5	490				
1000	8×10.5	340	10×10.5	410	10×10.5	450						
1500	10×10.5	475										

└ I~=Rated ripple current (mA) (105℃, 120Hz) I~=额定纹波电流 (mA) (105℃, 120Hz)

■ 额定纹波电流的频率系数
Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10K~100Hz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50